

Mobility Scooter / Electric Wheelchair /



ENJOYCARE
WWW.ENJOYCARE.COM



Mobility Scooter / Electric Wheelchair

Product Catalogue

ENJOYCARE

WWW.ENJOYCARE.COM



EML49A-D Optimus

Company Profile

Enjoycare Technology (Zhejiang) Co., Ltd was founded in 2010, it covers an area of 25,000 square meters. We devote to improve the elder's life quality and help the disabled people to get rehabilitation. We manufacture and export mobility scooters, power wheelchairs, and electric bicycles to more than 70 countries around the world. Enjoycare is one of the fastest growing global manufacturers of these products. Meanwhile, the company has established offices and warehouses in Dubai and Germany.

We are motivated with passion to work out safer, more qualified and affordable products. The company has its professional R&D division and hardware facilities, such as metal welding workshop, powder spraying workshop, UV baking workshop, CNC finishing workshop, injection workshop, aluminum die casting workshop, etc.

The company processes dozens of patent technologies and we are proud of having designed the first four-wheel driving stair climbing power wheelchair.

To be more competitive in electric vehicle industry, we have got Quality Management System Certifications of ISO 9001, ISO 13485, CE (MDR) , UKCA, SFDA for our products. We are honored to be awarded as "Jinhua High-tech Enterprise", "Zhejiang New Technology Enterprise" and "National High-tech Enterprise".

We are proud to say that we can produce the best power wheelchairs, mobility scooters and rehabilitation devices by the people here who have passion for doing the best.





EUROPE:

U.K.
 Norway
 Spain
 Poland
 Belarus
 Russia
 Benelux
 Slovakia
 Czech
 Slovenia
 Denmark
 Ukraine
 Finland
 France
 Germany
 Greece
 Iceland

ASIA:

China
 Thailand
 India
 Indonesia
 Japan
 Korea
 Malaysia
 Philippines
 Singapore
 Thailand
 Vietnam

AFRICA:

Egypt
 South Africa
 Algeria

AMERICA:

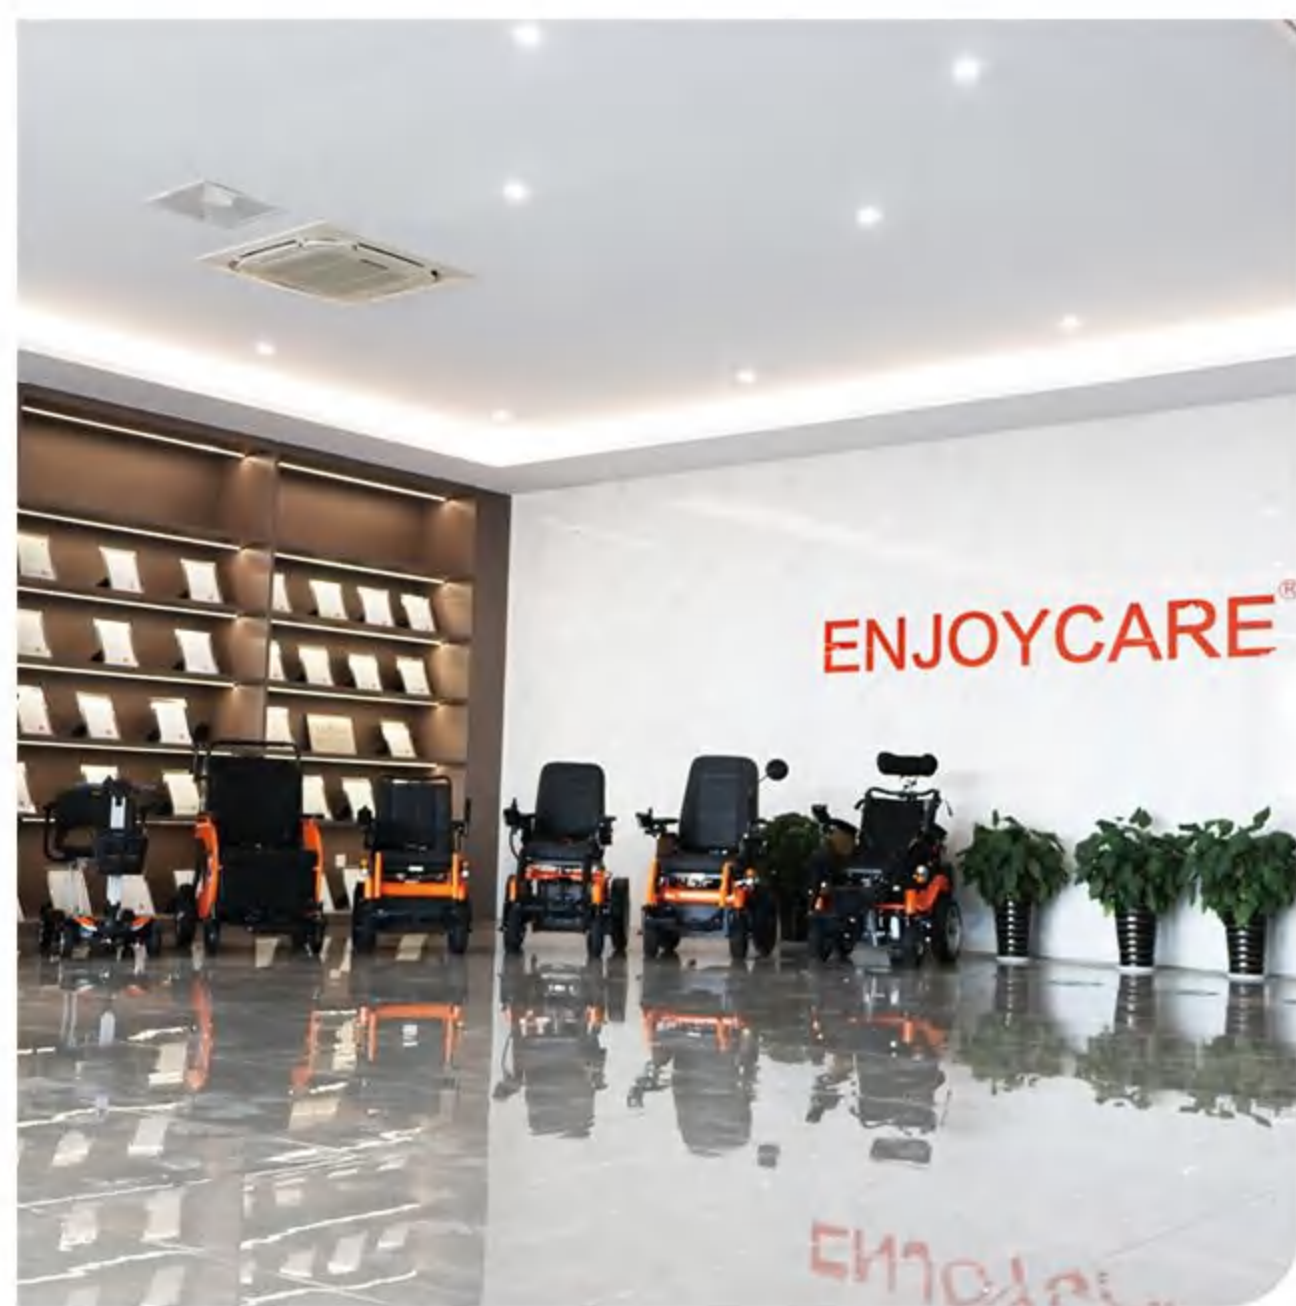
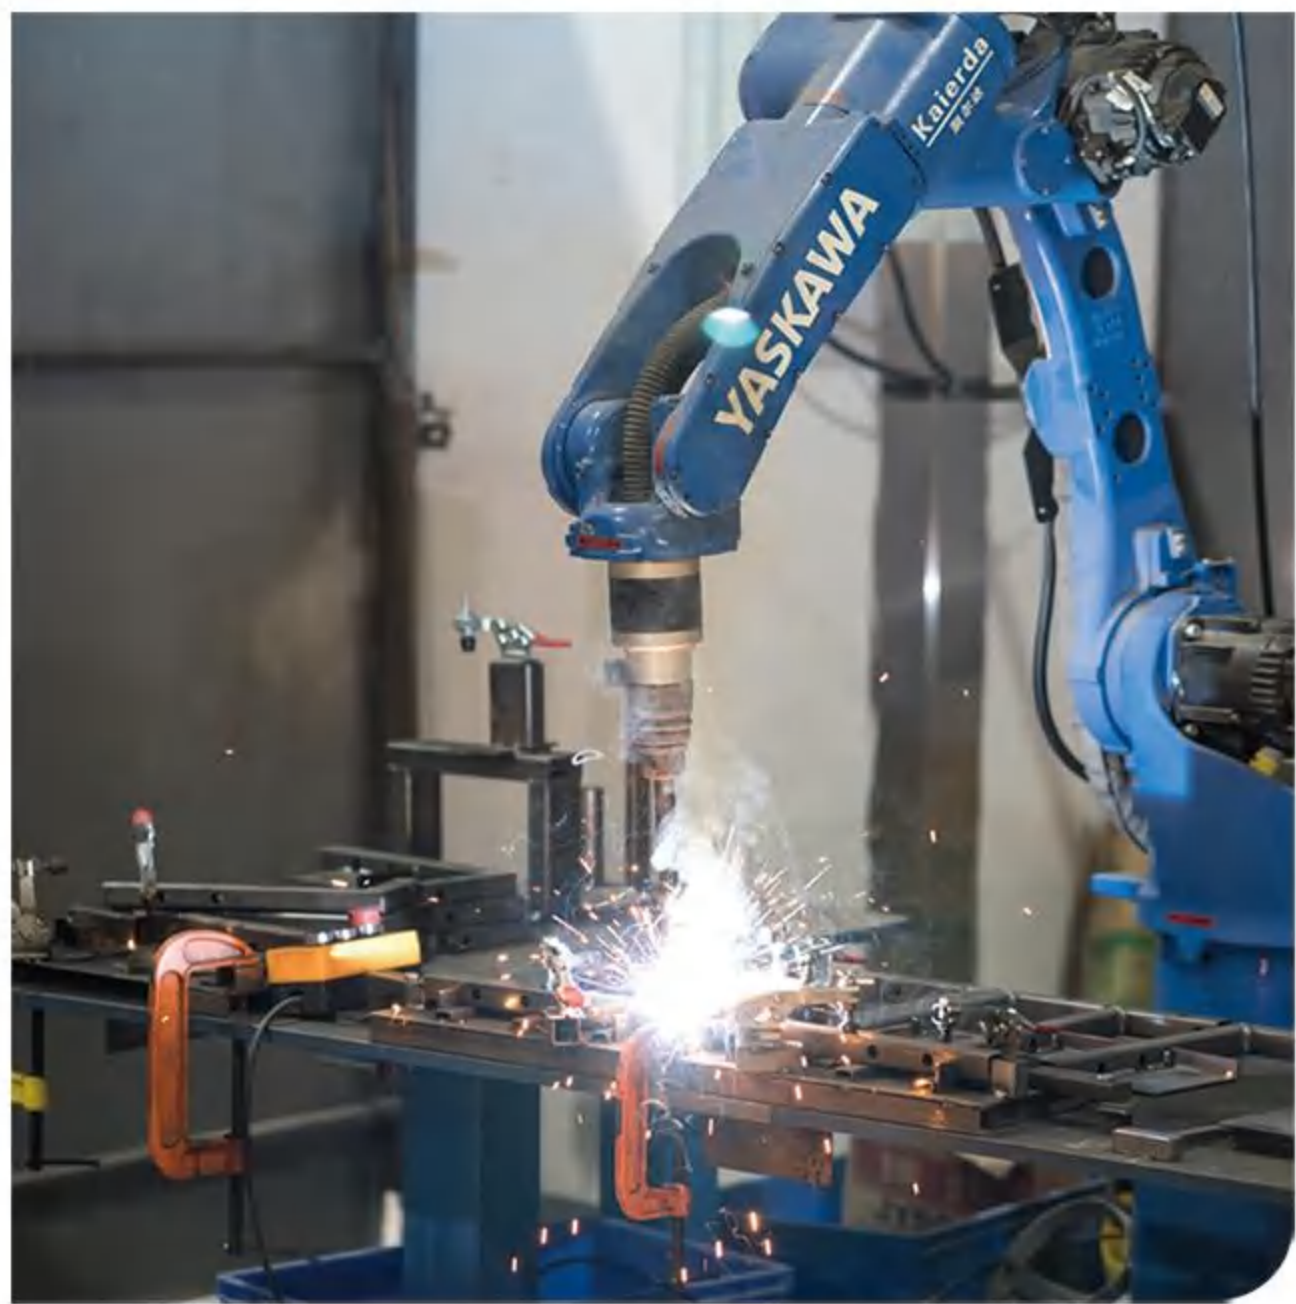
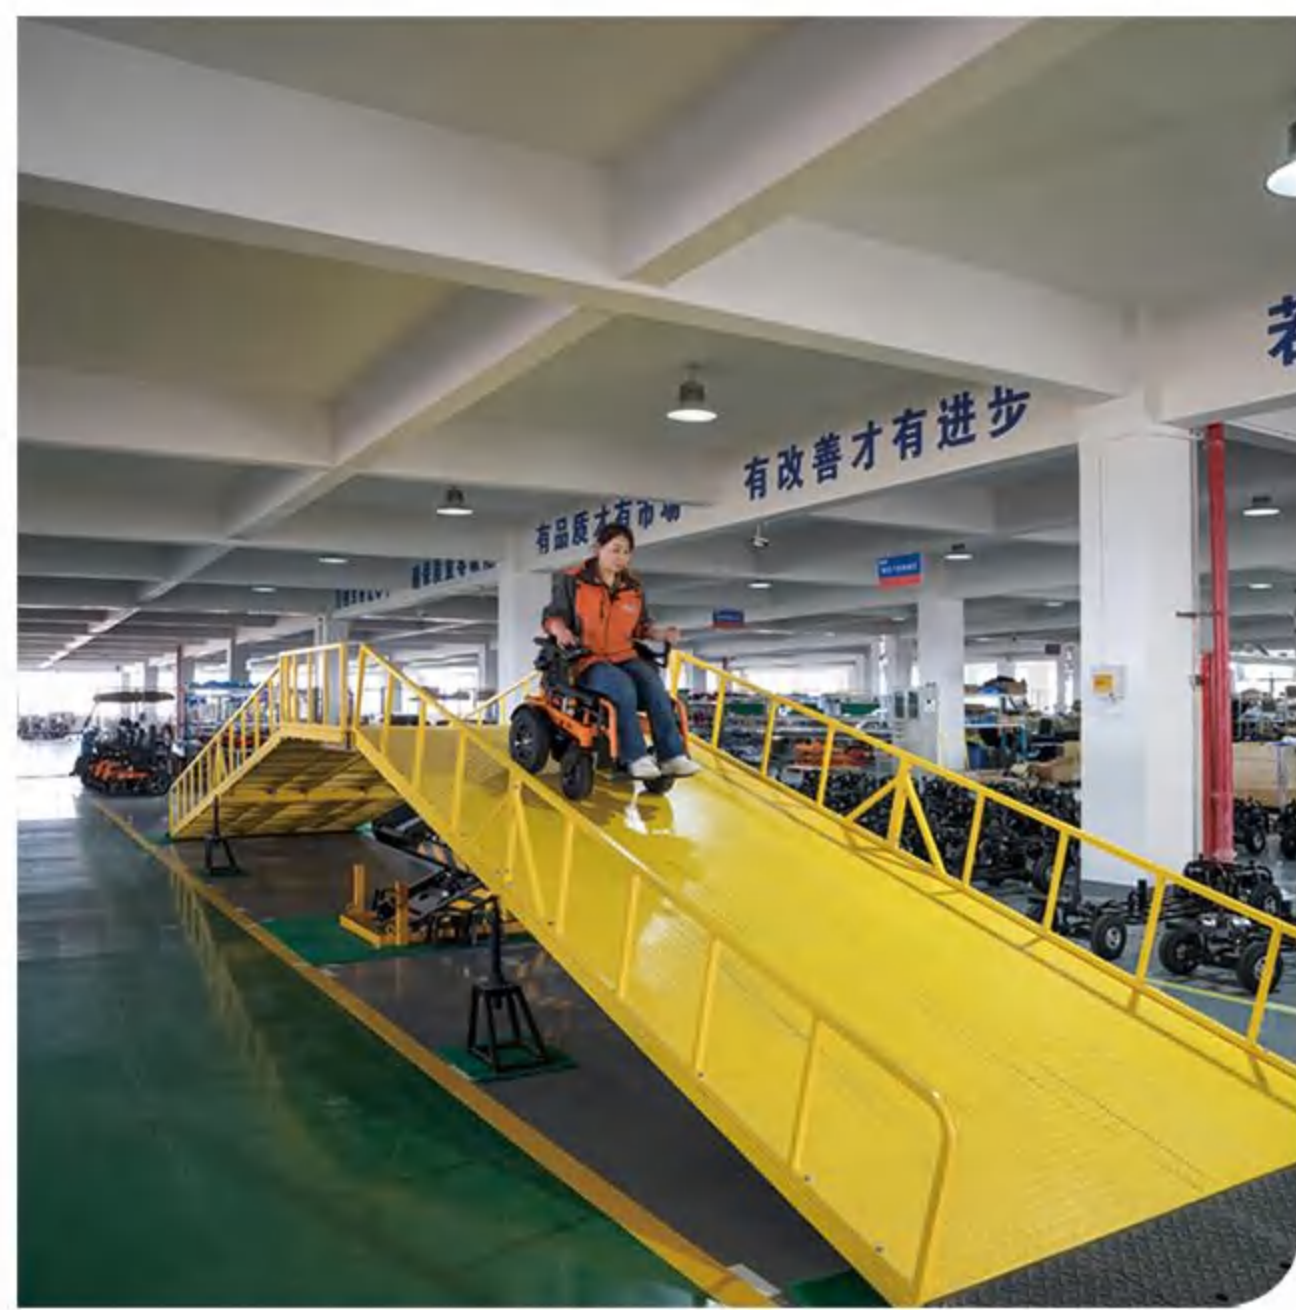
Argentina
 Canada
 Colombia
 Chile
 Mexico
 U.S.

OCEANIA:

Australia
 New Zealand

WEST ASIA:

Bahrain
 Iran
 Iraq
 Israel
 Kuwait
 Oman
 Qatar
 Saudi Arabia
 Turkey
 UAE







PRODUCTS MAP

Heavy-duty Wheelchair



Lightweight wheelchair



Medium and large scooter



Lightweight scooter



Rehabilitation Devices



Heavy-duty Wheelchair



EPW65



Container loading: 20'FCL/54pcs 40'HQ/117pcs

Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1140mm	1290mm	680mm	560mm	450mm	440mm	Front tires: 10"3.00-4 Rear tires :15"	12°	12km/h (adjustable)	45km±5km
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
180kg	24V 8A	75AH*2	8-10H	Front: Yes Rear: Yes	24V 75A	24V DC500W x 2	129kg	81kg	880*735*770 (mm)



Aluminum Frame

1.) **Excellent Stability:**

- High performance rearwheel drive with continuous acceleration.
- 500W x2 powerful motors bring speed without compromising on stability or control.

2.) **Electrically adjustable seat inclination system (tilting) and backrest system (reclining)**

3.) **Splendid LED Lighting:**

LED lighting control system enhances driving safety at night.



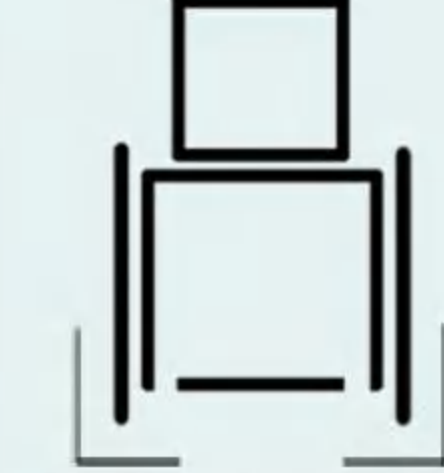



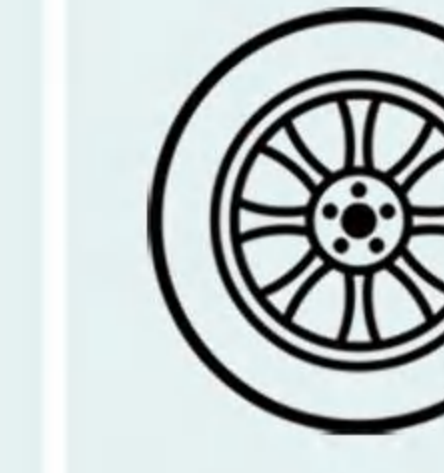





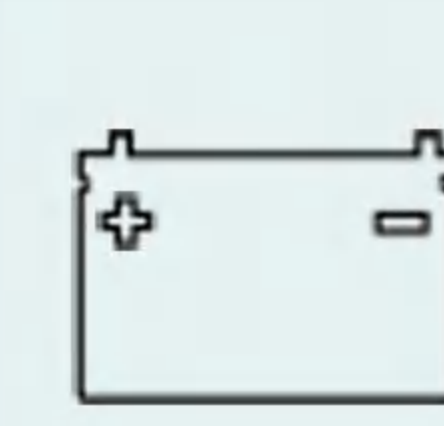


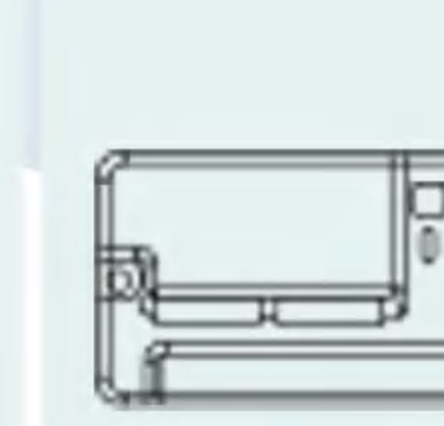
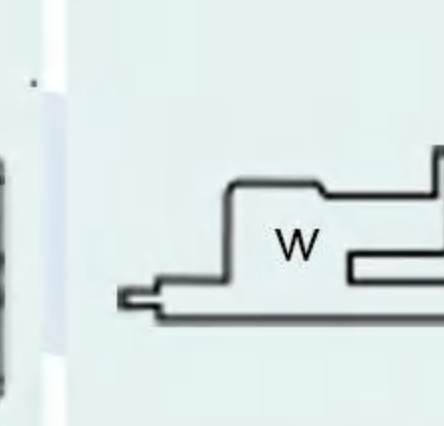
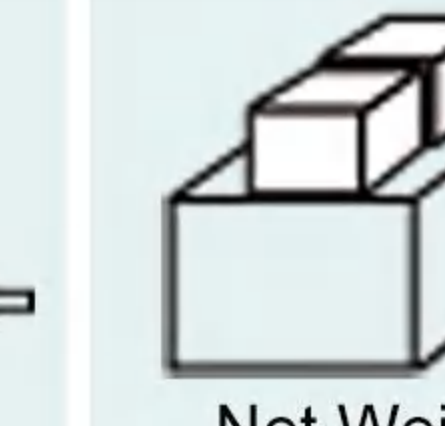
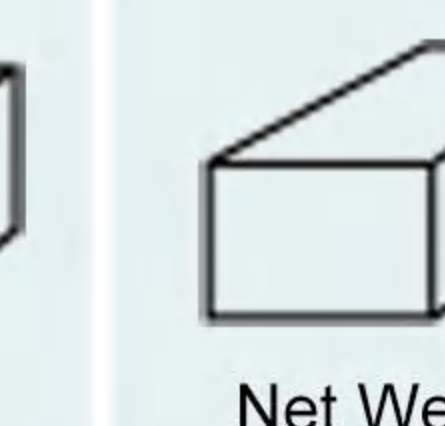
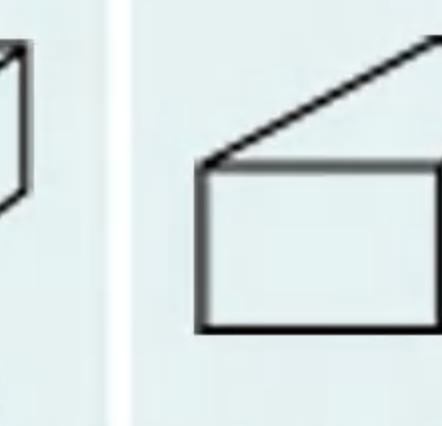
4.) **Large battery capacity up to 2pcs 75AH for longer driving range**



EPW65S



Container loading: 20'FCL/54pcs 40'HQ/117pcs

									
Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1140mm	1290mm	680mm	560mm	450mm	440mm	Front tires: 10"3.00-4 Rear tires :15"	12°	12km/h (adjustable)	45km±5km
									
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
180kg	24V 8A	75AH*2	8-10H	Front: Yes Rear: Yes	24V 75A	24V DC500W x 2	129kg	81kg	880*735*770 (mm)



Aluminum Frame



1.) **Excellent Stability:**

- High performance rearwheel drive with continuous acceleration.
- 500W x2 powerful motors bring speed without compromising on stability or control.

2.) **Separately Electrically adjustable system for the wheelchair :**

- Electrically adjustable backrest system (reclining)
- Electrically adjustable seat inclination system (tilting)
- Electrically adjustable footrest by together or separately system

3.) **Splendid LED Lighting:**

LED lighting control system enhances driving safety at night.



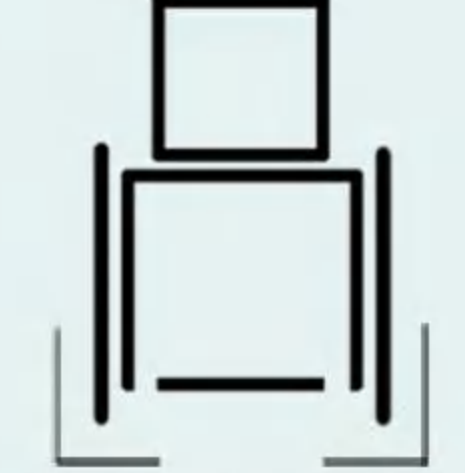


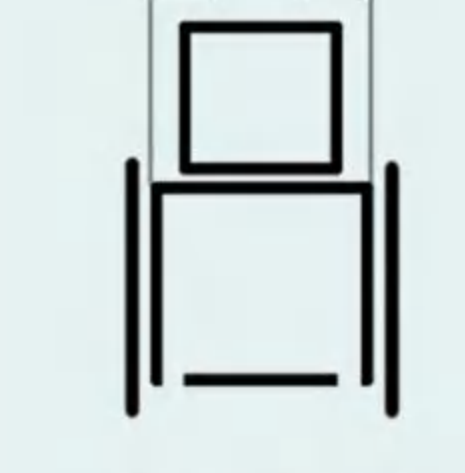
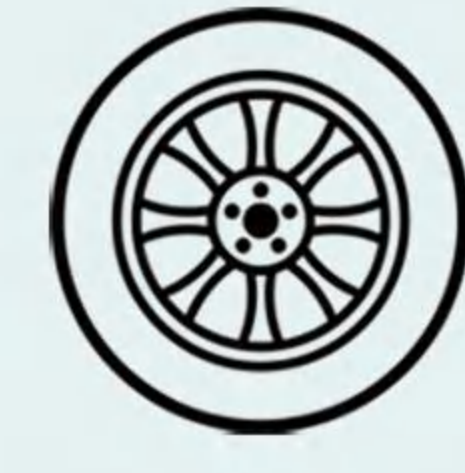








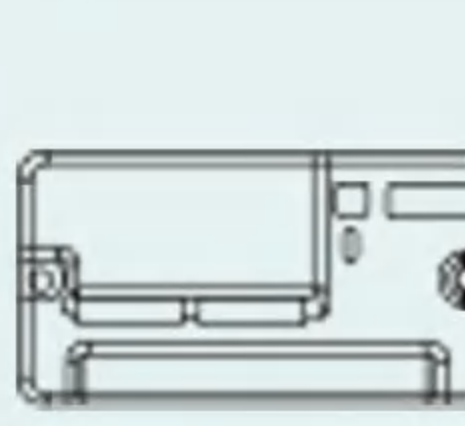
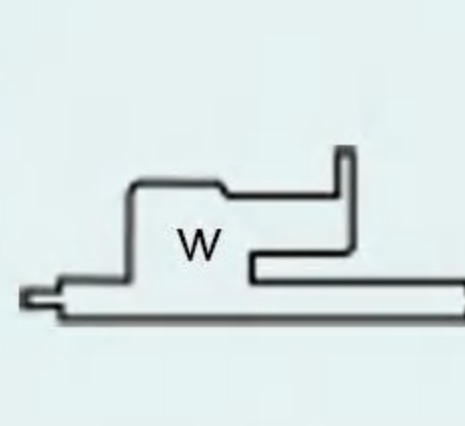

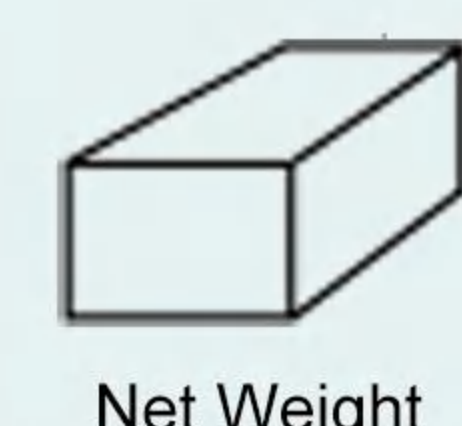
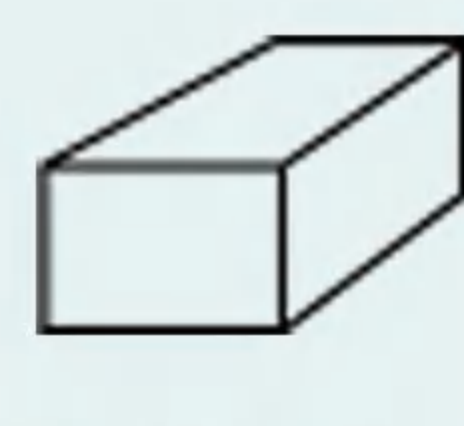
4.) **Large battery capacity up to 2pcs 75AH for longer driving range**

Heavy-duty Wheelchair



EPW62

Container loading: 20'FCL/60pcs 40'HQ/126pcs

									
Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1100mm	1000mm	630mm	530mm	440mm	440mm	Front tires: 10"3.00-4 Rear tires :14"3.00-8	15°	12km/h (adjustable)	40km±5km
									
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
160kg	24V 6A	55AH*2	8-10H	Front: No Rear: Yes	24V 75A	24V DC500W x 2	112kg	78kg	920*670*770 (mm)



1.) **Excellent Stability:**

- High performance rearwheel drive with continuous acceleration.
- 500W x2 (Taiwan Shihlin)powerful motors bring speed without compromising on stability or control.

2.) **Comfortable seat with manual recline.**

3.) **Splendid LED Lighting:**

LED lighting control system enhances driving safety at night.

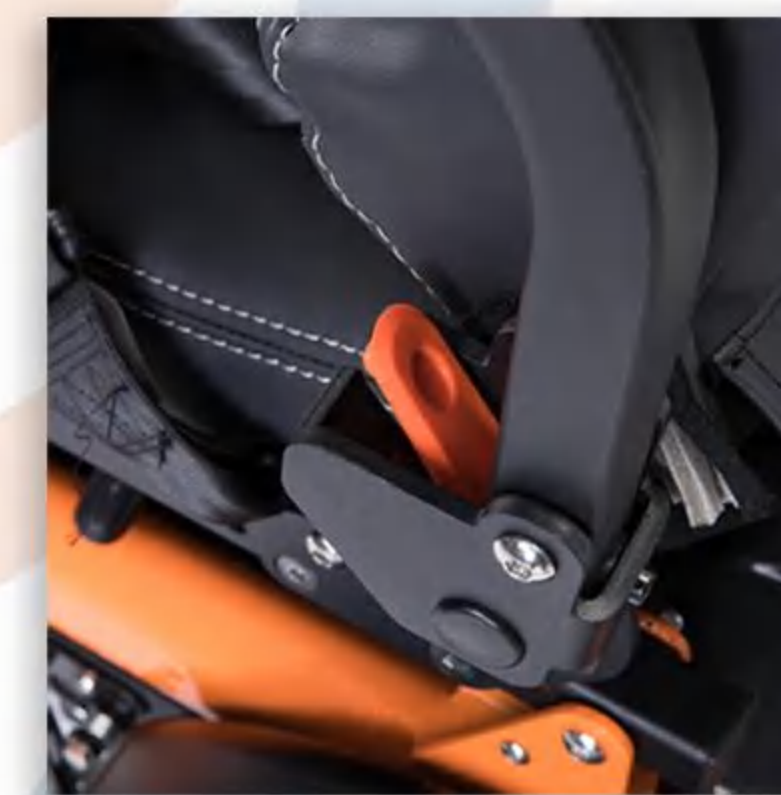
4.) **Outdoor Performance:**

10" caster, 14" rear wheel with suspension and mudguard offer an excellent outdoor experience

EPW62L

Container loading: 20'FCL/60pcs 40'HQ/120pcs

Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1150mm	1180mm	650mm	560mm	440mm	430mm	Front tires: 10"3.00-4 Rear tires :16"3.00-8	15°	12km/h (adjustable)	40km±5km
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
160kg	24V 6A	55AH*2	8-10H	Front: Yes Rear: Yes	24V 75A	24V DC500W x 2	117kg	83kg	960*680*770 (mm)



1.) Excellent Stability:

- High performance rearwheel drive with continuous acceleration.
- 500W x2(Taiwan Shihlin)powerful motors bring speed without compromising on stability or control.

2.) Captain Seat:

Comfortable seat with manual recline.

3.) Splendid LED Lighting:

LED lighting control system enhances driving safety at night.

4.) Outdoor Performance:

10" caster with suspension, 16" rear wheel with suspension and mudguard offer an excellent outdoor experience

EPW69



Container loading: 20'FCL/30pcs 40'HQ/90pcs

Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1190mm	1250mm	645mm	550mm	450mm	520mm	Front tires: 10"3.00-4 Rear tires :14"3.00-8	12°	11km/h (adjustable)	38km±5km (55AH)
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
160kg	24V 6A	55AH*2 75AH*2	8-10H	Front: Yes Rear: Yes	24V 75A	24V DC500W x 2	55AH:108kg 75AH:122kg	74kg	1120*750*840 (mm)



Aluminum Frame

1.) Excellent Stability:

- High performance rearwheel drive with continuous acceleration.
- 500W x2 powerful motors bring speed without compromising on stability or control.

2.) Captain Seat:

- High quality seat offers extra riding comfort.
- Comfortable seat with manual recline angle adjustment 0°- 65°

3.) Splendid LED Lighting:

- LED lighting control system enhances driving safety at night.

4.) Outdoor Performance:

- 10" caster with suspension, 14" rear wheel with suspension and mudguard offer an excellent outdoor experience

5.) Can be easily disassembled:

- The tool-free disassemble system makes traveling easier, they can easily be put in a car trunk.



EPW702S

Container loading: 20'FCL/36pcs 40'HQ/108pcs

Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1200mm	1040mm	700mm	600mm	450mm	440mm	Front tires: 10"3.00-4 Rear tires :16"3.00-10	12°	10km/h	40km±5km
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
150kg	24V 6A	24V 55AH*2	8-10H	Front: Yes Rear: Yes	24V 75A	24V DC400W x 2	120kg	86kg	950*750*820 (mm)



1.) Excellent Stability:

- High performance rearwheel drive with continuous acceleration.
- 400W x2 powerful motors bring speed without compromising on stability or control.

2.) Electrically adjustable seat inclination system (tilting)

3.) Comfortable seat with manual recline.

4.) Splendid LED Lighting:

LED lighting control system enhances driving safety at night.

5.) Outdoor Performance:

10" caster with suspension, 16" rear wheel with suspension and mudguard offer an excellent outdoor experience



EPW60-A

Container loading: 20'FCL/36pcs 40'HQ/108pcs

Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1190mm	1220mm	680mm	630mm	480mm	500mm	Front tires: 10"3.00-4 Rear tires :16"3.00-10	12°	10km/h (adjustable)	25km±5km
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
150kg	24V 4A AC 110-220/240V	35AH*2	6-8H	Front: Yes Rear: Yes	60A	24V 400W * 2	105kg	85kg	950*750*820 (mm)

- ▶ Programmable adjustable Joystick and can be used by left and right side of chair
- ▶ Standard battery can find in the local market
- ▶ Intelligent electromagnetic brake
- ▶ Adjustable height arm pad
- ▶ Swiveled leg rest with adjustable depth
- ▶ Heavy duty metal constructed frame.
- ▶ Indoor/outdoor use









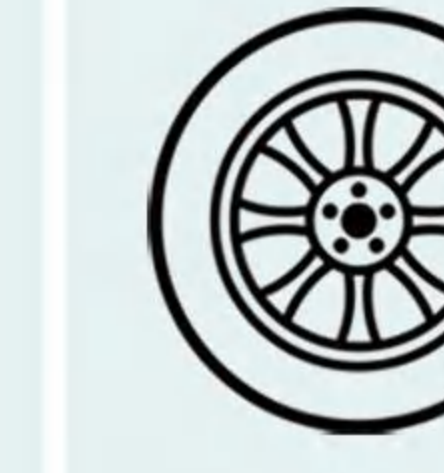





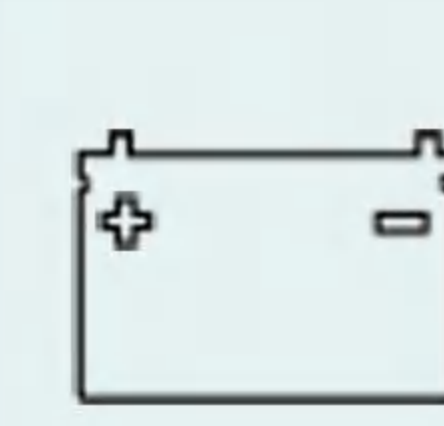


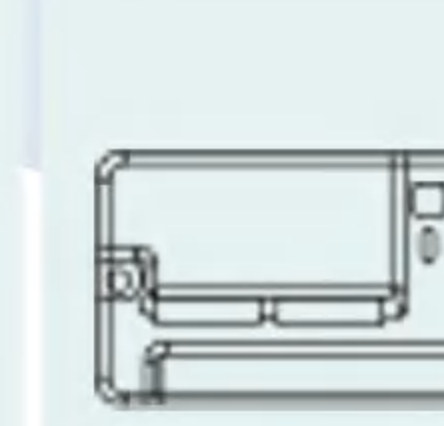
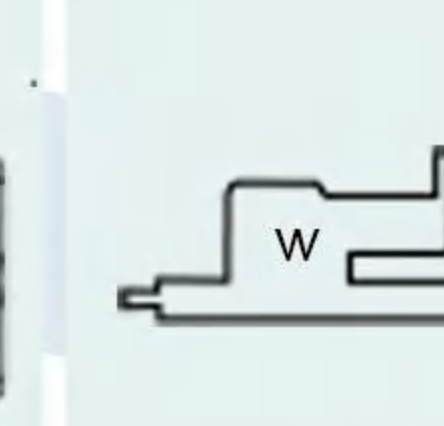
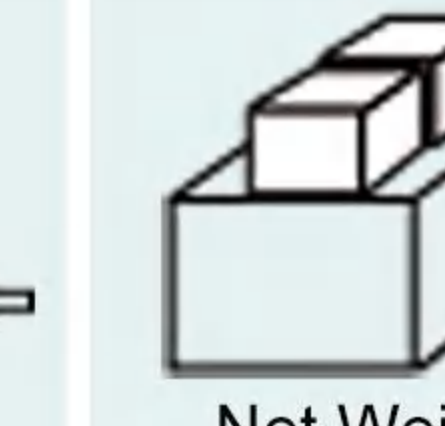
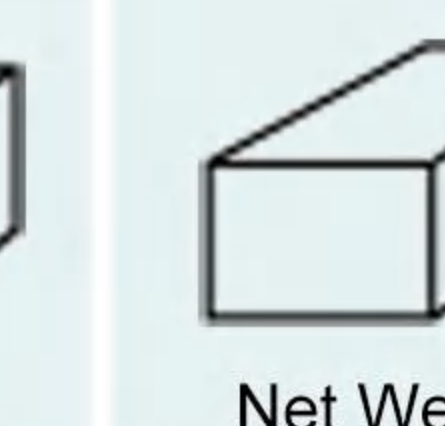
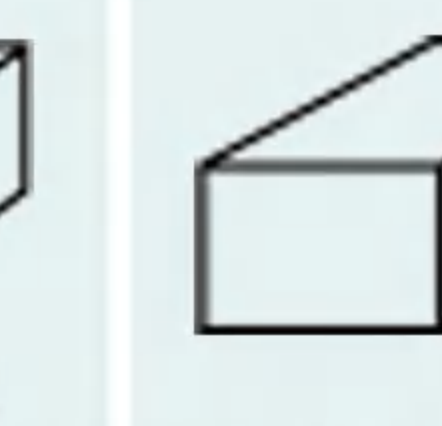
Options

Suck and blow control
Chin control



EPW60-B

Container loading: 20'FCL/36pcs 40'HQ/114pcs

									
Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1110mm	1100mm	680mm	630mm	380mm	380mm	Front tires: 10"3.00-4 Rear tires :16"3.00-10	12°	7km/h (adjustable)	25km±5km
									
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
150kg	24V 4A AC 110-220/240V	35AH*2	6-8H	Front: Yes Rear: Yes	60A	24V 400W * 2	101kg	81kg	890*750*820 (mm)

- ▶ Programmable adjustable Joystick and can be used by left and right side of chair
- ▶ Standard battery can find in the local market
- ▶ Intelligent electromagnetic brake
- ▶ Adjustable height arm pad
- ▶ Swiveled leg rest with adjustable depth
- ▶ Heavy duty metal constructed frame.
- ▶ Indoor/outdoor use



Options

Suck and blow control
Chin control

Child



EPW68/68S/68S-L

Container loading: 20'FCL/60pcs 40'HQ/126pcs

Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1150mm	1160mm	680mm	570mm	470mm	430mm	Front tires: 10" Rear tires :14"	12°	11km/h (adjustable)	35km
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
160kg	24V 6A	55AH*2	8-10H	Front: Yes Rear: Yes	24V 75A	24V DC500W x 2	110kg	75kg	860*700*730 (mm)



EPW66



For airport use

Container loading: 20'FCL/16pcs 40'HQ/66pcs

Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1265mm	1160mm	690mm	530mm	400mm	460mm	Front tires:200*50 Rear tires :3.00-8	6°	6km/h	35km
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
300kg	24V 6A	24V55AH	8-12H	Front: Yes Rear: Yes	24V75A	24V DC500W x 2	115kg	80kg	1040*760*1220 (mm)



EPW610



standing wheelchair

NEW



Dimensions:	1100*630*1250mm
braking performance:	1.2m
Max. forward speed:	9km/h
Max. backward speed:	3km/h
Turning radius:	1050mm
Climbing capability :	10°
Motors:	24V 320W*2
Battery:	24V55AH*2
Controller:	Dynamic 75A
Range:	40km
Charger:	DC 24V/ 6A
Front tires:	200*50mm
Rear tires:	14" (3.00-8)
Weight Capacity:	160kg
Weight:	N.W131kg / G.W141KGS
Packing size:	1170*690*880mm
Container loading:	30pcs/ 20'GP 90pcs/ 40'HQ

Seat depth adjustable 80mm, height adjustable 360mm



EPW611

Auto Folding

NEW

Dimensions:	1090*640*976.5mm
Max. forward speed:	6km/h
Max. backward speed:	3km/h
Climbing capability :	≤7°
Motors:	24V DC240W*2 (brushless)
Battery:	24V12AH/20AH(Lithium Battery)
Range:	18km(24V 12AH)
Range:	35km(24V 20AH)
Charger time:	4-5h
Controller:	24V 40A
Charger:	24V 3A
Front tires:	8"
Rear tires:	8"
Weight Capacity:	130kg
Net Weight:	25kg(with batteries)
Battery Weight:	1.4kg
Packing Size:	930*660*460mm
Container loading:	100pcs/ 20'GP 210pcs/ 40'HQ


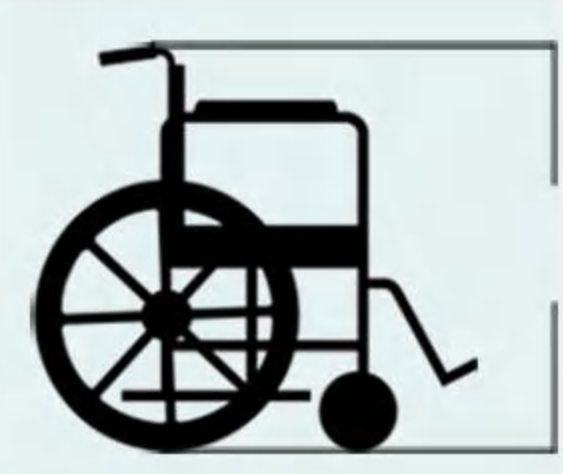
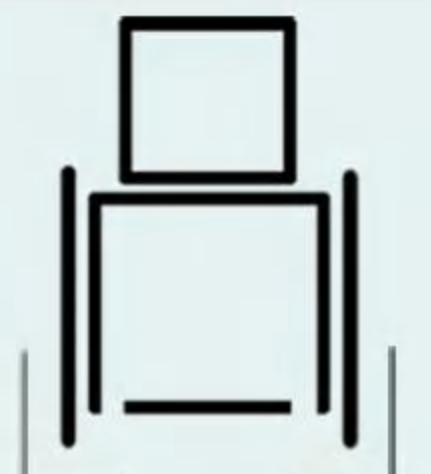


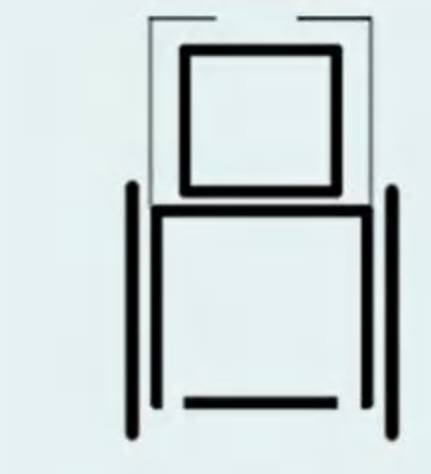
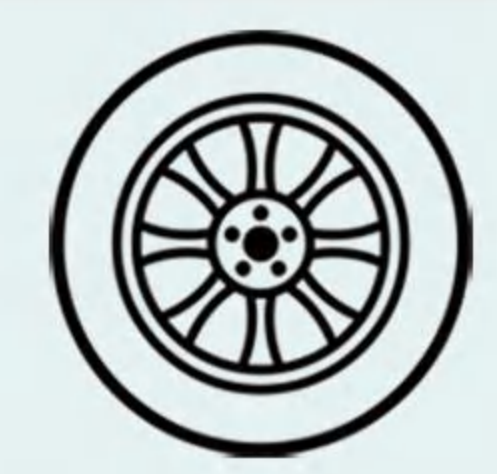




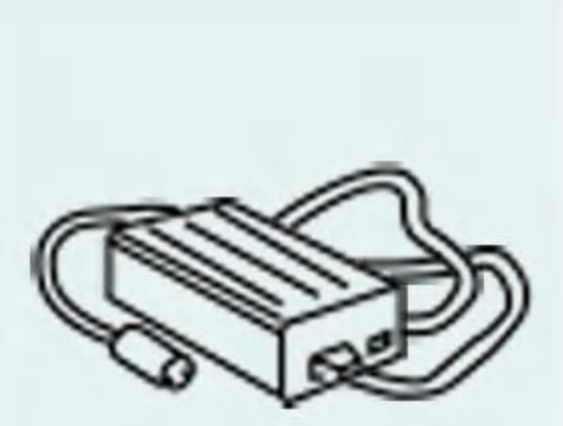



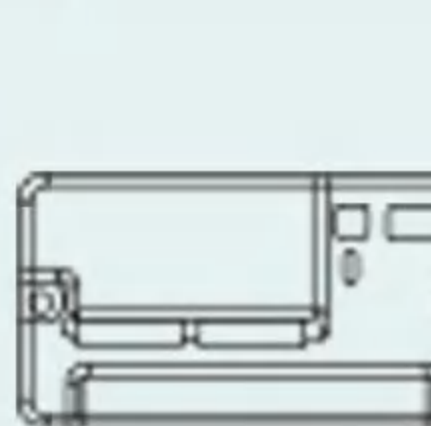
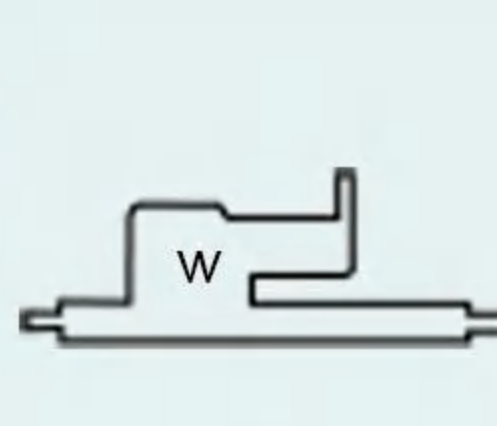


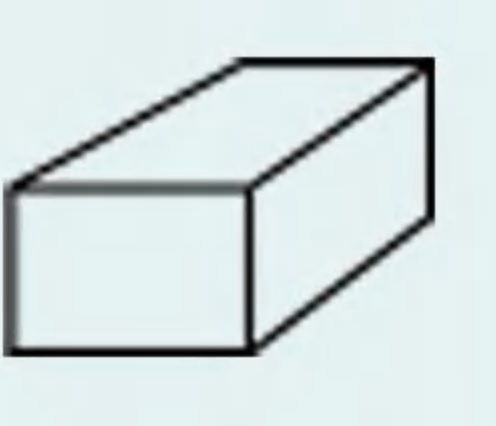


Lightweight Wheelchair



EPW601A

Container loading: 20'FCL/150pcs 40'HQ/324pcs

									
Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1100mm	960mm	630mm	450-630mm	450mm	450mm	Front tires:200*50mm Rear tires :320mm	10°	6km/h	20km(13AH) 40km(26AH)
									
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
130kg	24V 2A	24V/13AH*1 lithium battery	4-5H	Front: No Rear: No	24V 35A	24V 250W*2	25kg	22.5kg	650*390*820 (mm)






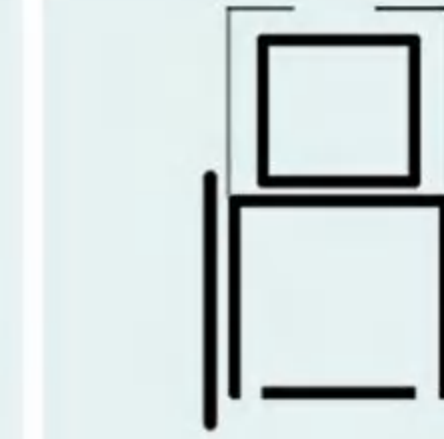
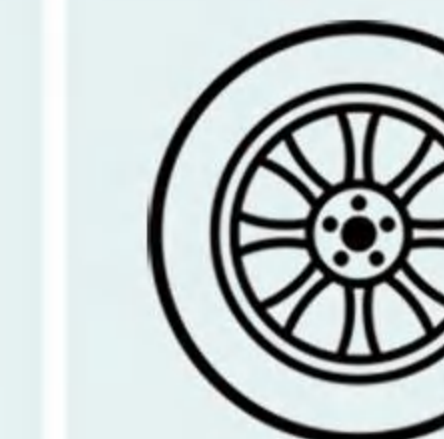





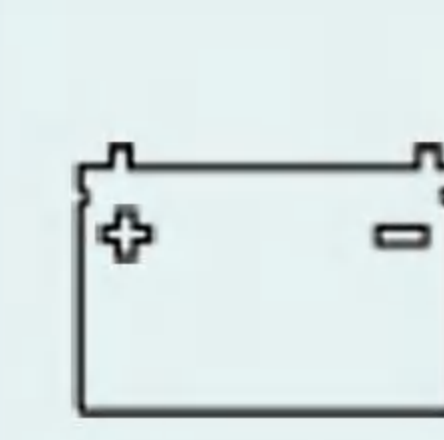


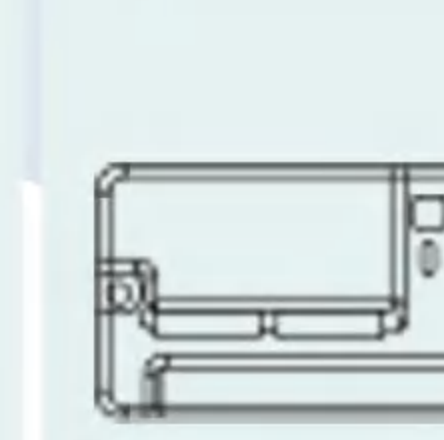
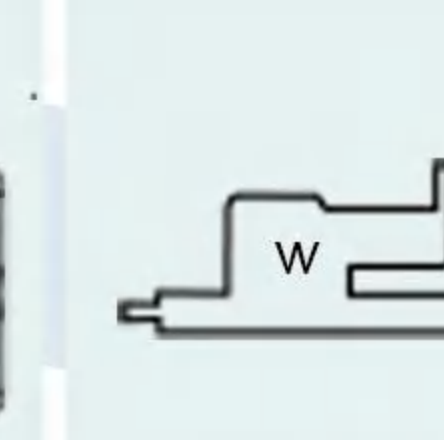
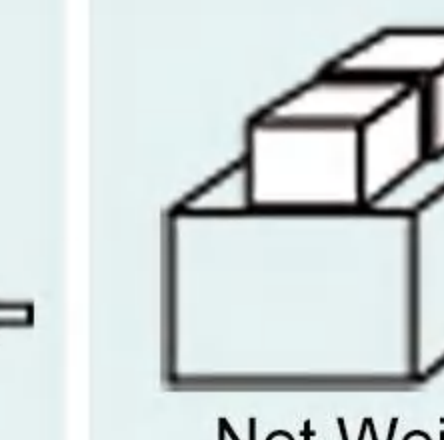
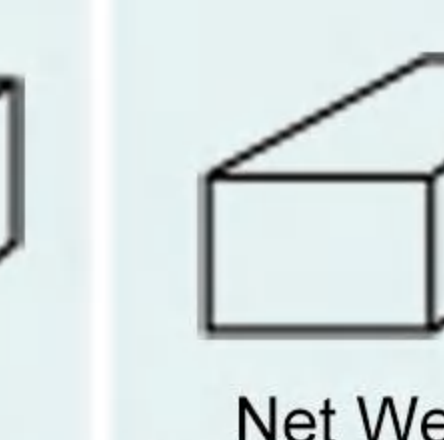
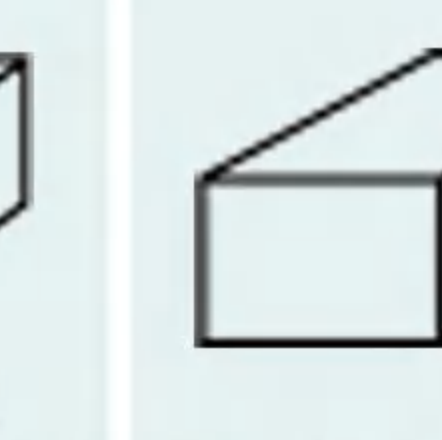
Aluminum Frame



EPW63A

Aluminum Frame

Container loading: 20'FCL/108pcs 40'HQ/285pcs

 Vehicle length	 Vehicle height	 Vehicle width	 Seat height	 Seat depth	 Seat width	 tire	 Max. climbing angle	 Max. forward speed	 Range
910mm	840mm	560mm	530mm	400mm	380mm	Front tires: 7" Rear tires :8"	≤7°	7km/h	18km
 Weight capacity	 Charger	 Battery	 Charge time	 Suspention	 Controller	 Motor	 Net Weight (with batteries)	 Net Weight (without batteries)	 Package Size
115kg	24V 3A	24V/12AH lithium battery	4-5H	Front: No Rear: No	24V40A	24V250W*2 brushless	19.8kg	18.4kg	740*600*500 (mm)



classic

Lightweight Folding



Lightweight wheelchair



EPW67A

with half lying function

EPW67B

Container loading: 20'FCL/147pcs 40'HQ/300pcs

Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1030mm	930mm	610mm	480mm	400mm	440mm	Front tires: 7 inch Rear tires : 11 inch	10°	≤6km/h	20km
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
110kg	24V 2A	6AH/12AH/24AH	4-5H	Front: No Rear: No	40A	Brushless 150W*2	17.6kg	16.3kg	800*330*780 (mm)



Aluminum Frame



EPW67C



Container loading: 20'FCL/115pcs 40'HQ/246pcs












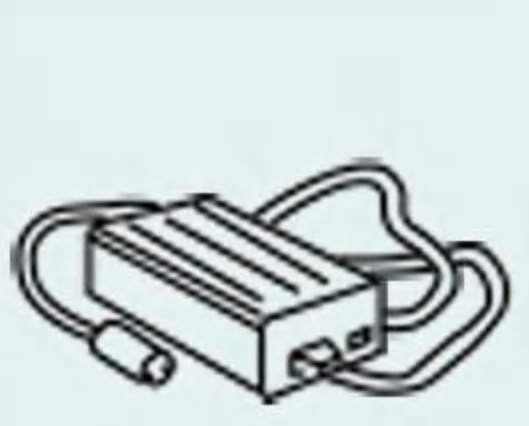
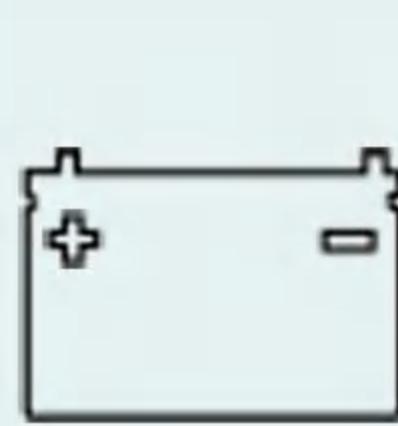


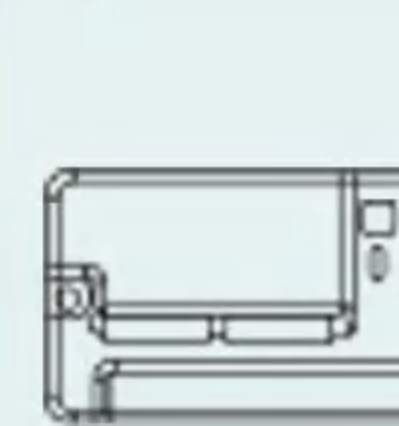
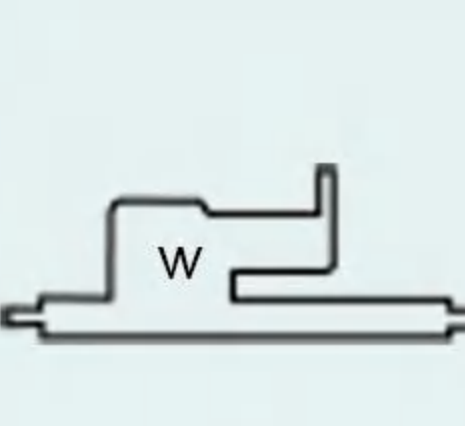


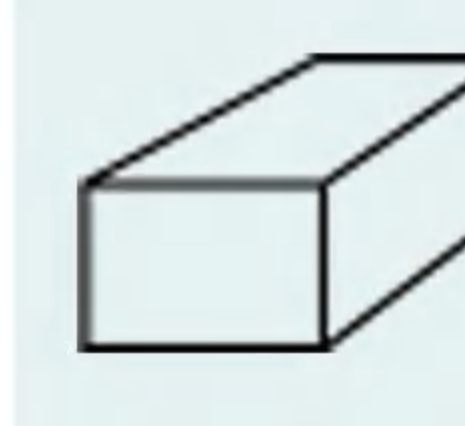
Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1040mm	940mm	670mm	510mm	430mm	440mm	Front tires: 8" Rear tires: 12"	≤9°	6km/h	18km
Weight capacity	Charger	Battery	Charge time	Suspension	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
130kg	24V 3A	24V 12AH lithium battery	8-10H	Front: No Rear: No	24V 40A	250W*2	28kg	25kg	670*460*800 (mm)

Aluminum Frame



EPW67D

Container loading: 20'FCL/115pcs 40'HQ/240pcs

									
Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1040mm	940mm	670mm	510mm	430mm	440mm	Front tires: 8" Rear tires: 12"	≤9°	6km/h	18km
									
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
130kg	24V 3A	24V 12AH lithium battery	8-10H	Front: No Rear: No	24V 40A	250W*2	28kg	25kg	680*465*810 (mm)













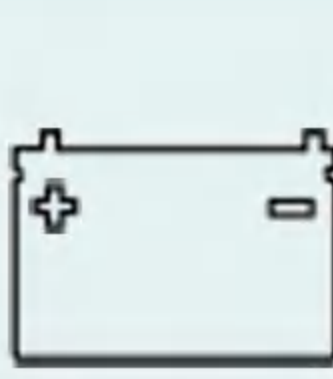



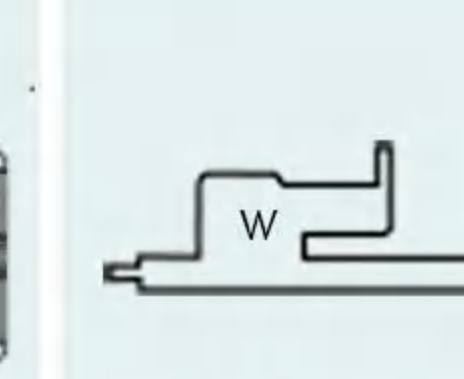

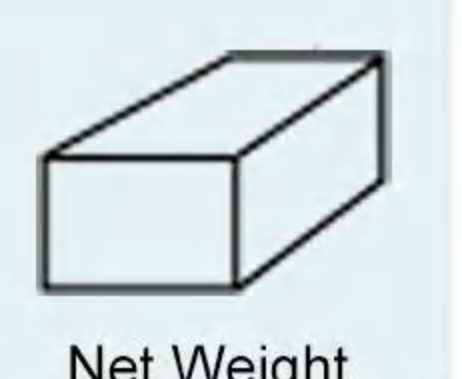
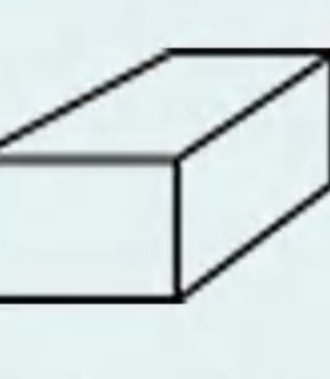
Aluminum Frame



EPW63









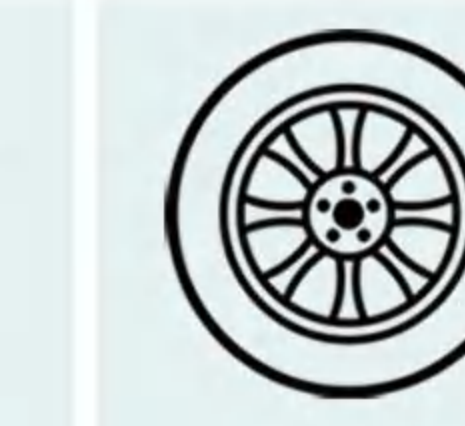





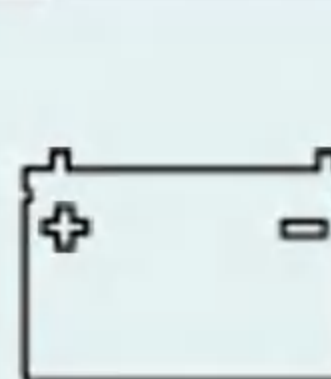


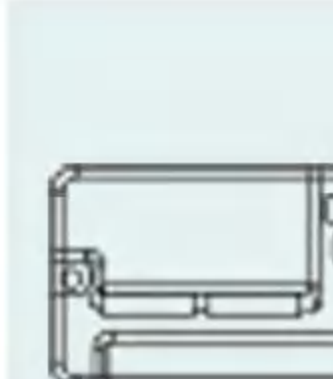
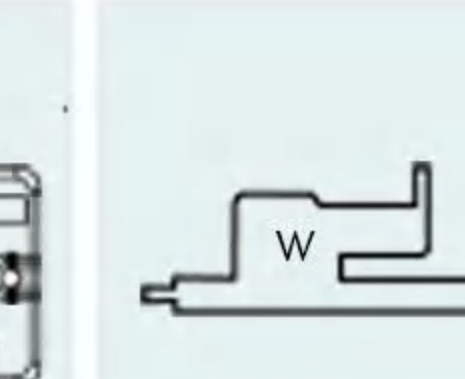
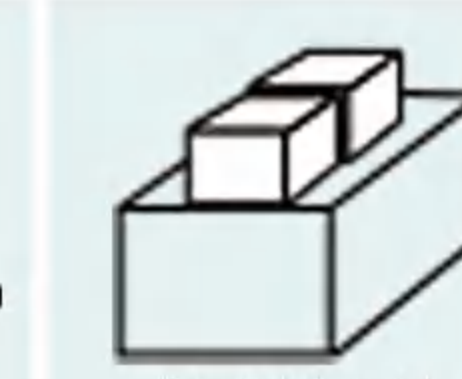

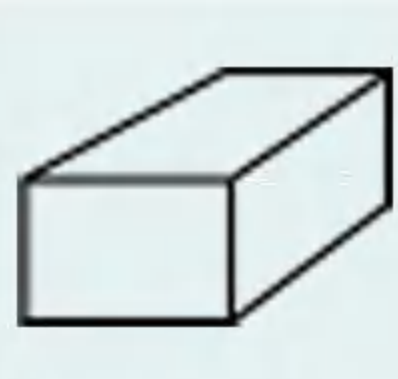
Container loading: 20'FCL/144pcs 40'HQ/288pcs

 Vehicle length	 Vehicle height	 Vehicle width	 Seat height	 Seat depth	 Seat width	 tire	 Max. climbing angle	 Max.forward speed	 Range
920mm	850mm	630mm	500mm	420mm	460mm	Front tires : 8" Rear tires : 12"	9°	6km/h	15±5km
 Weight capacity	 Charger	 Battery	 Charge time	 Suspention	 Controller	 Motor	 Net Weight (with batteries)	 Net Weight (without batteries)	 Package Size
110kg	24V 2A	12AH Acid battery	4-5H	Front: No Rear: No	35A	250W*2	30kg	22kg	710*380*760 (mm)

Lightweight Folding

EPW67



 Vehicle length	 Vehicle height	 Vehicle width	 Seat height	 Seat depth	 Seat width	 tire	 Max. climbing angle	 Max.forward speed	 Range
1150mm	650mm	950mm	390mm	420mm	520mm	Front :10"PU soild Rear tires :16"	≤12°	6km/h	15km
 Weight capacity	 Charger	 Battery	 Charge time	 Suspention	 Controller	 Motor	 Net Weight (with batteries)	 Net Weight (without batteries)	 Package Size
140kg	AC 100-240V 50/60HZ	24V 12AH	4-5H	Front: No Rear: No	40A	250W*2	44kg	35kg	810*470*800 (mm)
















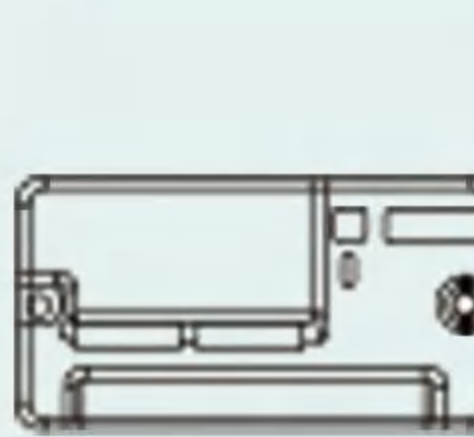
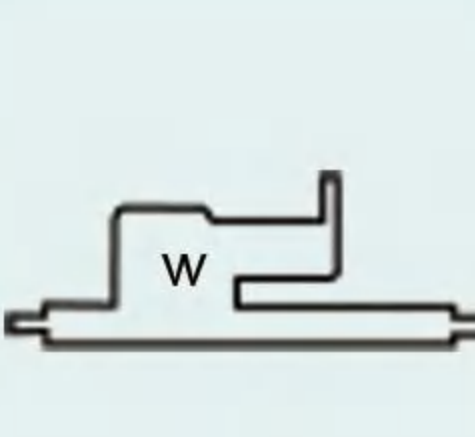


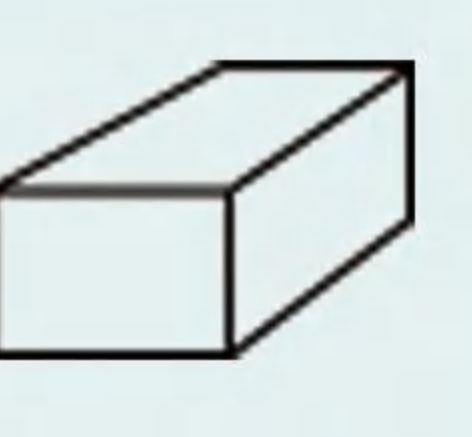
Container loading: 20'FCL/96pcs 40'HQ/204pcs

EPW706



Carbon fiber frame

Container loading: 20'FCL/132pcs 40'HQ/318pcs

									
Vehicle length	Vehicle height	Vehicle width	Seat height	Seat depth	Seat width	tire	Max. climbing angle	Max. forward speed	Range
1030mm	840mm	600mm	450mm	420mm	460mm	Front tires: 7" Rear tires : 10"	12°	7km/h	20km
									
Weight capacity	Charger	Battery	Charge time	Suspention	Controller	Motor	Net Weight (with batteries)	Net Weight (without batteries)	Package Size
136kg	24V 3A	24V 12AH lithium battery	4-5H	Front: No Rear: No	24V 40A	180W*2 brushless	16.9kg	15.3kg	880*320*740 (mm)



LCD, LED light, USB



EPW63(NEW)



Frame:	6061/T5 Aluminium Alloy
Vehicle size:	940*540*900mm
Motors:	24V/200W*2 (Brushless)
Battery:	24V12AH lithium
Controller:	Joystick (Brushless)
Charger:	24V2A/3A
Weight Capacity:	110kgs
Driving Range :	15km(12Ah)
Front Tyres:	7inch
Rear Tyres:	12inch
G.W:	22kgs
N.W:	17.3kgs
Packing size:	670*280*790mm
Container loading:	20'FCL/200pcs 40'HQ/470pcs

EPW61-K3S

with actuator (electronic rise and down)

Dimensions:	92*77*62 cm
Folded dimensions:	87*60*33 cm
Motor:	48V 250W brushless hub motor
Controller:	Smart Controller
Battery:	48V 10AH Lithium Battery
Display:	LCD (speed , battery volume)
Brake:	Disc Brake
Wheel:	12 inch

Charging Time:	7 to 8 hours
Range:	35km to 45km
Max Speed (forward):	20 km/h
Max Speed (backward):	4 km/h
N.W:	19 KGS
G.W:	23 KGS
Packing Size:	1060*710*300mm
Container loading:	20'FCL/111pcs 40'HQ/297pcs



Medium and Large scooter



EML49A-D Optimus

EML49A-D Optimus



Automatic deceleration at turns

Dimensions:	1600x720x1170 mm	Charger:	24V 8A battery charger
Ground clearance:	83mm	Front tires:	13 inch , 100/60-8
Max. forward speed:	15 km/h (adjustable)	Rear tires:	13 inch, 115/55-8
Max. backward speed:	6-8 km/h (adjustable)	Weight Capacity:	180kgs
Turning radius:	1.73 m	Weight:	N.W 152kgs / G.W192 kgs
Climbing capability :	12°	Battery Weight:	23kgs *2
Motor:	24V 1400W (Taiwan MTM)	Packing size Body:	1655*755*880mm
Battery:	12V 75Ah*2 lead acid	Packing size Seat:	650*600*420 mm
Controller:	PG S-Drive 200A	Container loading:	20'FCL/21pcs 40'HQ/54pcs

**Range
70km**



EMW35



Dimensions :	1500x660 x1200mm
Max. Speed (km/h) :	15km/h
Turning Radius :	1.28m
Max climbing grade :	15°
Ground Clearance :	80mm
Wheel :	16inch
Motor:	DC 24V 1100W (Taiwan MTM)
Battery :	12V 55AH X2
Controller :	140A
Electric Brake :	Warner 24V
Weight Capacity :	185kg
Gross weight:	123kg
Travel Range :	up to 55KM
Free Wheeling :	Manual
Wheel Hub :	Aluminum Alloy
Packing size:	1560*740*1100mm
Container loading:	20'FCL/20pcs 40'HQ/44pcs





EML46DP

Dimensions :	1450*660*1250mm
Ground clearance :	80mm
Max.forward speed :	10km/h
Max.backward speed :	2.8km/h(optional)
Turning radius :	1.9m
Braking distance :	1.6m
Climbing capability :	15°
Motor :	DC 24V 450W
Battery :	12V 32AH x 2 lead acid
Charger :	24V4A
Net weight :	105kg
Front tires :	10"*3.00-4
Rear tires :	10"*3.00-4
Weight Capacity :	170Kg
Charge time :	6-8h recommended
Packing size:	1460*710*660mm
Container loading:	20'FCL/48pcs 40'HQ/100pcs

EML46A

Dimensions :	1450 x 660 x 1250mm
Ground clearance :	80mm
Max. forward speed :	12.6km/h
Max. backward speed :	2.8km/h
Turning radius :	1.9m
Braking distance :	1.6m
Climbing capability :	15°
Motor :	24V 800W (Taiwan MTM)
Battery :	12V 55AH x 2 lead acid
Charger :	24V 6A battery charger
Charge time :	6-8h Recommended
Front tires :	12"*4.00-4
Rear tires :	12"*4.00-4
Weight Capacity :	170kg
Net Weight :	105kg
Packing size:	1460*710*660mm
Container loading:	20'FCL/48pcs 40'HQ/100pcs



JODOLL

JODOLL
乔顿

Lightweight Scooter





EMW42A

Dimensions:	1080*490*940mm
Ground clearance:	85mm
Max. forward speed:	8km/h
Max. backward speed:	3km/h
Turning radius:	1.85m
Climbing capability:	12± 5°
Motors:	24V 250W
Battery:	12V 20AH* 2pcs
Controller:	Curtis 70A

Charger:	DC 24V/ 2A AC 180-250V
Front tires:	198*65 MM , PU Solid tyre
Rear tires:	198*65 MM , PU Solid tyre
Weight Capacity:	120kg
Weight:	N.W 44kg / G.W 50KGS
Battery Weight:	5.7kg*2
Packing size:	1100*530*570mm
Container loading:	20'FCL/80pcs 40'HQ/168pcs



EMW41/EMW41A



FEATURES:

- Compact and fresh new look**
- Durable yet lightweight**
- Foldable and highly portable**
- Easily adjustable tiller height**
- Long distance coverage**
- Front and back lighting**
- Optimized for one-man or two-man carry**
- Easily detachable seat**
- Switch control of electromagnetic brake**

Container loading: 20'FCL/96pcs 40'HQ/252pcs

Model	EMW41	EMW41A
Weight capacity	300 lbs.	300 lbs.
Drive Wheels	Rear	Rear
Maximum speed	6.0 km/h	6.0km/h
Operating Range	15.0 km	22.0 km
Ground Clearance	3.20 in.	3.20 in.
Turning Radius	43.5. in.	43.5. in.
Type Batteries	10AH (Battery Box)	10AH(Battery Box)
Colors	Red, Blue tc.	Red, Blue White etc.
Freewheel Mode	Yes	Yes
Electronic Speed Control	Yes	Yes
Electro- Brakes	Yes	Yes
Charger	Off-board / 2A	Off-board / 2A
Controller	50 Amp (Dynamic)	50 Amp Dynamic R-Series
Length	38.6 in.	38.6 in.
Width	18.5 in.	18.5 in.
Height (ground to top seat back)	34-35.5 in.	34-35.5 in.
Ground to top of Seat	22-23in.	22-23in.
Ground to top of Deck	4.0 in.	4.0 in.
Deck to top of Seat	17.5-19.5 in.	17.5-19.5 in.
Front axle to Rear axle	28.7 in.	28.7 in.
Weight of Unit: (NO Seat/ Battery)	44 lbs.	47 lbs.
Weight of Seat	15.5lbs	15.5lbs
Weight of battery	4.2lbs	5.9lbs
Tires:	Solid	Solid
Front	6.3 in. *2in	6.4 in. *2in.
Rear	7.4 in. *2in	7.3 in. *3in.
Rear Anti-Tip Wheels	2 in.	2 in.
Standard Seat:	Stadium Style	Stadium Style
Seat Back Height	14 in.	14 in.
Width x Depth	16"x 14"	16"x 14"
Folding Dimension	38.6*18.5*11.8 in	38.6*18.5*11.8 in
(No saet and Basket)		
Front light	Yes	2-LED
Rear light	Yes	LED (Red)
Front Basket	Yes	Yes
USB Ports	No	Yes

NEW

EMW410



Integral magnesium alloy accurate die casting



Dimensions:	1138*530*885mm
Max. forward speed:	6km/h
Max. backward speed:	3km/h
Turning radius:	860mm
Climbing capability :	12± 5°
Motors:	24V 180W
Battery(lithium):	24V10AH/18AH
Controller:	Dynamic 50A
Charger:	DC 24V/ 2A
Front tires:	7"
Rear tires:	8"
Weight Capacity:	136kg
Weight:	N.W 20KG / G.W 23KGS
Packing size:	1050*580*470mm
Container loading:	110pcs/ 20'GP 220pcs/ 40'HQ

EMW411



NEW

Dimensions:	1008*500*812mm
Max. forward speed:	6km/h
Max. backward speed:	3km/h
Turning radius:	870mm
Climbing capability:	12± 5°
Motors:	24V 180W
Battery:	24V10AH/18AH lithium battery
Controller:	Dynamic 50A
Charger:	DC 24V/ 2A
Front tires:	7"
Rear tires:	8"
Weight Capacity:	125kg
Weight:	N.W 18KG / G.W 21KGS
Packing size:	1050*520*400mm
Container loading:	110pcs/ 20'GP 264pcs/ 40'HQ



EK819

Aluminum frame

Dimensions:840*530*910mm

Rear tires: 10 inch (diameter) honeycomb wheel

Front tires: 6 inch (diameter) honeycomb wheel

Weight capacity:100kg

Net weight:8kg

Seat width:400mm

Seat height: 500mm

Seat depth:350mm

Backrest height:460mm

Packing size:550*300*790mm

Container loading: 20'FCL/210pcs 40'HQ/485pcs



EK818

Aluminum frame

Material: Aluminum alloy

Surface treatment: Oxidized bright silver

Total length: 83cm

Total width: 50cm

Total height: 92cm

Seat width:40cm

Seat height:46cm

Armrest height:21cm

Front tires: 5 inch

Rear tires: 8 inch

Net weight: 9 kg

Max weight capacity: 100 kg



safety catch



Front shock absorbers



EK912

Product: Electric lift patient transfer chair

Material: Iron, Plastic

Maximum Loading: 150kg

Power supply: Battery, rechargeable

Rated power: 96W

Voltage: DC 24V

Lifting range: 33cm , from 40 to 73cm

Dimension: 131x72.2x54.5cm

Waterproof level:IP44

Application: Home, hospital, nursing home

Feature: Electric lift

Functions: Patient transfer/patient lift/toilet/ bath chair/wheelchair

Patent: Yes

Wheel: Two front wheel are with brake

Door width, chair can pass it: At least 55cm

It suites for bed: Height of bed from 11cm to72cm

Packing size: 885x585x345mm

Container loading: 20'FCL/152pcs 40'HQ/408pcs



EK911

Product: Patient Transfer Commode Chair(Manual model)

Seat Height:440-740mm

Armrest Height: 930-1230mm

Backrest Height: 960-1260mm

Seat size: 450mm*430mm

Base height: 130mm

Overall Length: 640mm

Overall Width: 550mm

Weight Capacity: 150kg

Packing size:540*530*730mm

Container loading: 20'FCL/120pcs

40'HQ/320pcs

Made of steel frame,surface with coating

Blister forming backrest

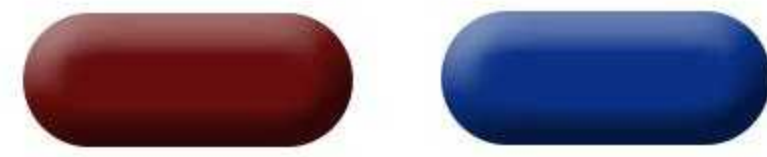
Seat combined with ABS + steel

Foldable armrest












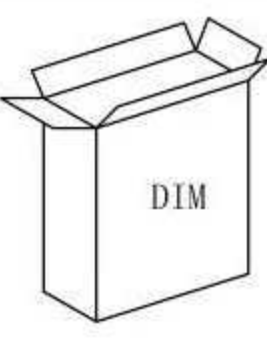

Height adjustable by manul handle



EK910



Aluminum frame

													
Width (mm)	Length (mm)	Fold width (mm)	Seat Width (")	Rear Wheel (")	Front Wheel (")	Seat Height (mm)	Backrest Height (mm)	Total Height (mm)	Weight Capacity (KG)	Pcs/CTN	Carton Size (mm)	NW	GW
630	640-685	345	18	6	6	485-535	220	745-875	120kg	1	520*170*560	5.5	6.2

EK311



EK312



EK321



EK322



EPWH6



Dimensions:	L 800* W 650* H1070mm
Battery:	24V/13AH lithum
motor:	200W
Front Tyres:	4 cm
Rear Tyres	12cm
Weight Capacity:	150kg
Oice decibel:	<50decibel
Level road:	handle push
Weight:	30kg
Apron wheel:	handle
Style:	Folding
Packing size:	1140*710*440mm
Qty/20':	75PCS
Qty/40'HQ:	186PCS

EK06201



Made of steel frame, surface with coating
Front 3" wheels without brake
Rear 4" wheels with brake
The legs can be opened by pedal
RICHMAT Motor
The hand controller with one function
With Emergency stop button
With Emergency drop device
With backup battery

Electric Standard Patient Lifter

Arm Length:	990mm
Leg Length:	1190mm
Overall Width:	590mm
Base Open Width:	860mm
Hook Height:	720-1730mm
Push Handle Height:	1140mm
Base Clearance:	115mm
Motor:	Richmat
Weight Capacity:	295kg
Input Voltage:	220V 50HZ
Packing Size:	1140*650*260mm
Container loading :	120pcs/20GP , 276pcs/40HQ



Accessory Diagram

Lamps



Tires



Controllers



Motors



Batteries & Chargers



Other



Accessory Diagram



body shield



Front Basket Bag



car rear bag



car rear bag



dog trailer



large armrest bag



car rear basket



Cargo trailers



Scooter walker holder



sunshade



Rear box



Oxygen cylinder holder



single cane holder



Multi-function stand



**ENJOYCARE
GROUP**

WWW.ENJOYCARE.COM

Enjoycare Technology (Zhejiang) Co., Ltd

TEL: 0086-13586979699

E-mail: scooter@enjoycare.com

Address: No. 1699 Xinyuan Road , New Energy
Vehicle Town Wucheng District , Jinhua ,
Zhejiang 321000 P.R China

SUNTECH INTERNATIONALTRADING CO. L.L.C

E-mail: dubai01@enjoycare.com

TEL: +9710551882918

Address: B18, Wasl District Building
1004-2, Al Maktoum Hospital Rd, Naif,
Deira, Dubai, UAE

ENJOYCARE MOBILITY EUROPE GMBH

Address: Address: Hafenstr. 19, 47809 Krefeld, Germany.

E-mail:sales@enjoycare.com



Website QR Code



E-catalogue
Enjoycare 2024



scan the QR code
and share the panorama